


EM-650 Rol-Dek[®] Aluminum Abrasive Insert

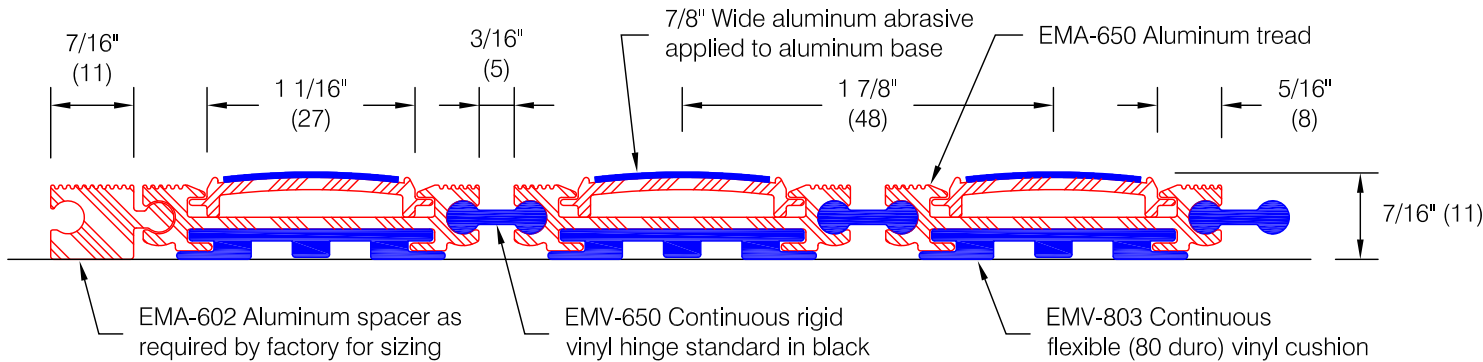


Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144" (3658)
- Aluminum abrasive insert: Extruded aluminum base with applied abrasive strip
- Static Coefficient of Friction (ASTM D-2047-82)
 Dry: > 1.14, Wet: > 1.20

Optional Framing:


*** Pawling requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.**

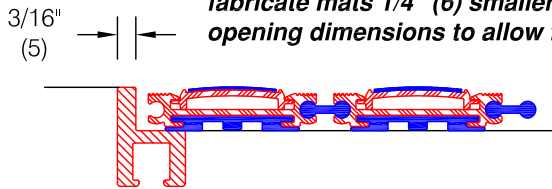

Recessed frame MRF-1002 (see ED.1.0) or MRF-1005 (see ED.2.0)

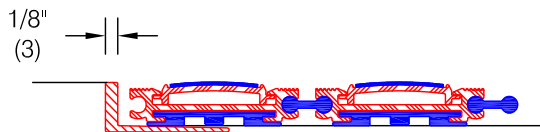


Recessed frame SSF-125 (see ED.3.0)

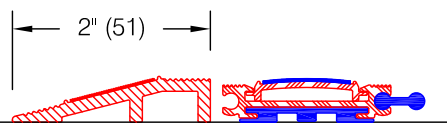


Surface frame BSF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge

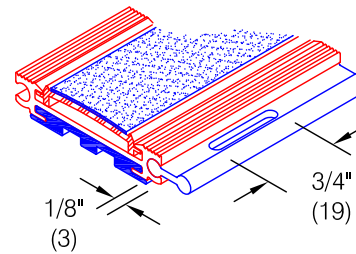

Perforated hinge

Optional Nosings:



Square vinyl nosing (see ED.20.0)






Beveled vinyl nosing (see ED.21.0)

Finishes:

- Aluminum tread and spacer:
 Mill finish (standard) #405
 Medium bronze anodized #404
 Clear anodized #403
 Black anodized #462
- Vinyl cushion and hinge: Black
- Insert base: Mill finish aluminum #405
- Insert: Mill finish aluminum #405, w/ an applied manufacturer's standard color abrasive strip

Sectioning information:

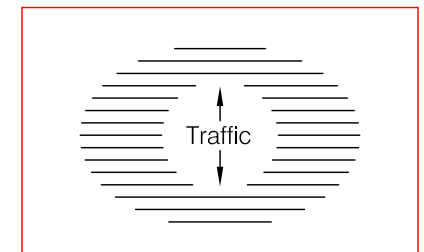

*** Mats over 66 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.13.5b